


All Purpose Display & Storage Freezer

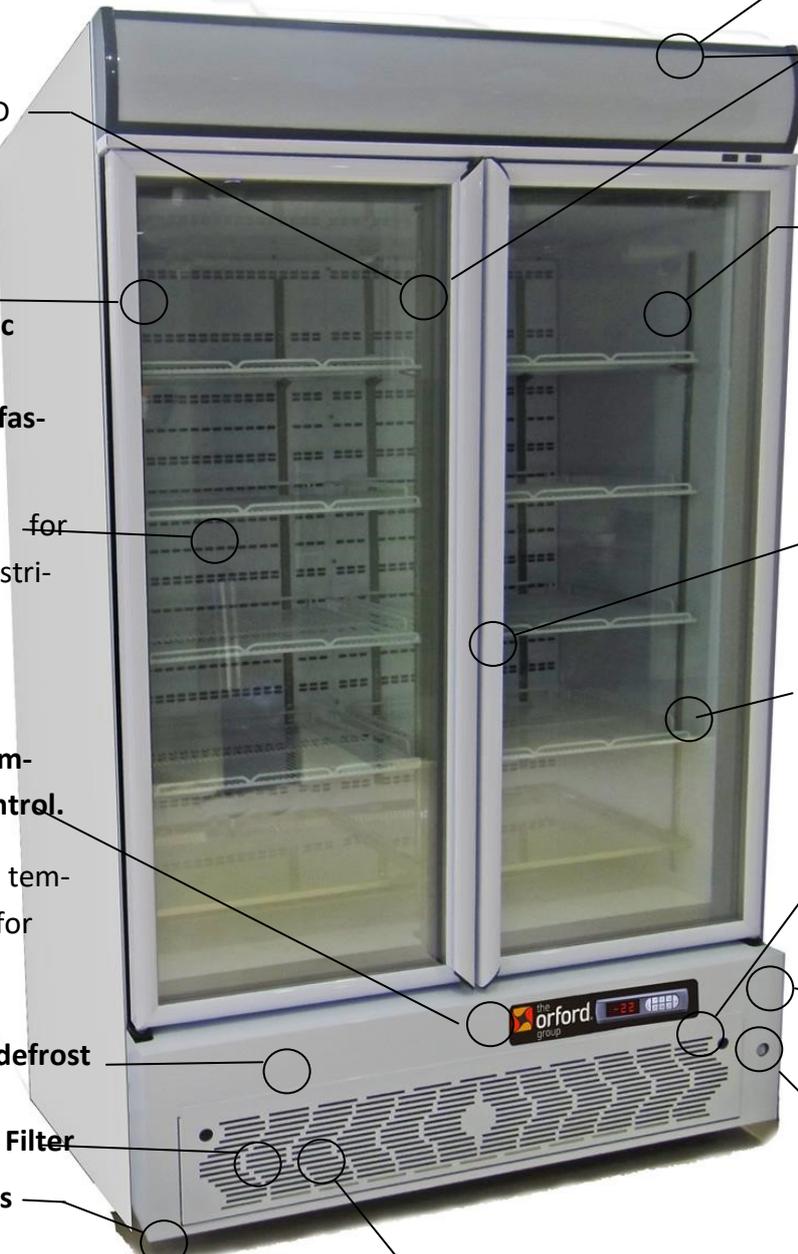

Full height Internal LED "Twin" spread lighting

Patented Dual magnet door sealing and plastic fascia, thermal break with easy replaceable fascia heaters

Ducted air flow system for even temperature distribution

Carel digital electronic controller for precise temperature and defrost control.

Carel HACCP function & temperature alarm system for added food safety.

Energy efficient hot gas defrost

Easy access condenser Filter

Easy roll lockable castors

Brilliant LED Sign Panel

Automated and Manual lighting control

Self closing triple glazed toughened safety glass doors, double low E, Argon filled, incorporating the latest warm edge technology

Full Length Easy Grip Door Handle

Door sensor controlled evaporator fans

"Shhhh" whisper quiet operation

Electronically commutated fan motors

Voltage surge protection

Energy Saving Motion sensor Lighting control

Evolution is an **Easy Clip** fully removable, freezer package



High Energy Efficiency

Proudly Australian Designed
by The Orford Group



IP protected by AUS DSN no 345317

With Evolution comes much responsibility. The Orford Group continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.

+617 46345 278 or
0418 700 006
1300 ORFORD (673 673)

PO Box 18120
Clifford Gardens
Queensland 4350
Australia

www.orford.com.au

Features

- World Class Design ➤ Energy Efficiency ➤ Performance
- Quality ➤ Reliability ➤ Surge Protection
- Removable signbox

Removable Freezer Package

- Cassette Style: Removable without tools
- Minimal training required for non-qualified personal to replace the package
- Ambient air intake from the front, Hot condenser discharge air exits through rear

Compliance

- Electrical Compliance to Australian Standard AS / ANZ 60335.2.89 including Amdt 1:2013 for electrical safety

Motion Sensing Lighting Control

- Automatically switches lighting on as customers approach
- Automates your energy savings



Lighting Control

- Automated or manual control, you choose
- Independent switching of interior and sign lighting

LED light tubes

- Replaceable by non-qualified personal. (Extra low voltage 24V DC)


Condenser Filter

- Easy Access Filter : No tools, no covers to remove


Patent Protected
Design by Orford
Refrigeration



| VB36L-Sn-A | Vertical Display Freezer with Illuminated Advertising Sign |
|------------------------------|--|
| Construction | Powder Coated galvanized steel Interior /Exterior White |
| Capacity | 1071 Litres (Gross) |
| Dimensions | 1286W x 870D x 2220H (mm) |
| Weight | 250 Kg (net) |
| Operating Temp | -19° to -23° C. |
| Ambient Temp Range | 0° - 40° C. |
| Power Point | 220 - 240v 50Hz. (Standard GPO) |
| Input Current | 6.3 Amps |
| Thermometer | Digital |
| Shelves | 8 Height Adjustable Heavy Duty PVC Coated |
| Shelves | 2 Fixed Stainless Steel Base Shelves |
| Shelf Adjustment | 12mm Increments |
| Refrigerated Shelf Area | 2.62 m ² |
| Condensate Disposal | Automatic by energy efficient, No Cost, Hot Gas |
| Full Handled Door | 2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E, Warm edge with removable torsion bar, heated frame |
| Footings | Heavy Duty Castors, Lockable Front |
| Interior Light | LED, Automatic and manual control |
| Refrigerant | R404a |
| Drier | Solid Core |
| Insulation | 60mm Polyurethane, CFC, HCFC, HFC Free |
| Cabinet Classes | 3L1, 4L2, 5L3 up to 40 degree Celsius ambient |
| MEPS | Compliant (High Efficiency) |
| * Energy Consumption | 19.03 kWh/24h/m2 |
| Condenser Filter | Easy front access |
| Illuminated Advertising Sign | 205mm High, Top Mounted |
| Sign Illumination | LED, Automatic (motion sensor control) and manual control |
| Temperature Alarms | High and low temperature alarms |
| HACCP Function | Alarm system |
| Defrost | Energy Efficient Hot Gas |
| Sign Illumination | LED, Automatic and manual control |

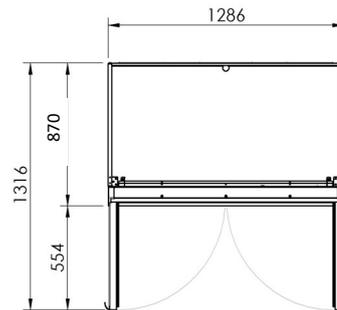

With Evolution comes much responsibility. Orford continues to develop World Class Energy reduction systems to improve the lives of our customers and future

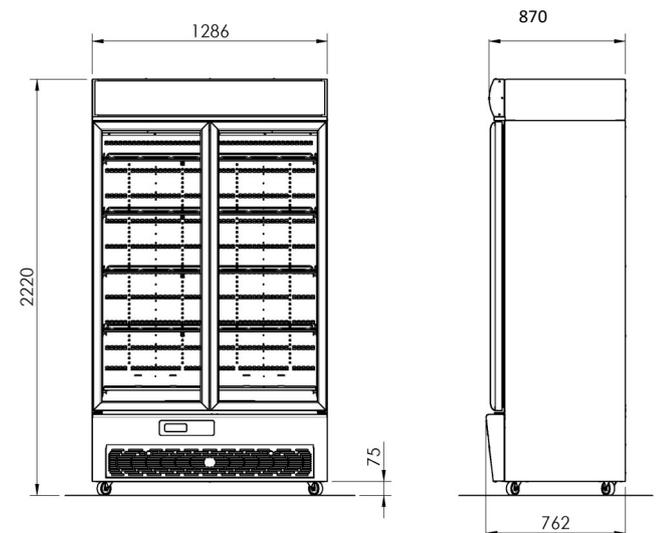

* Energy Consumption measured at 25°C. Cabinet Class 3L1 as per Australian Standard AS1731

