


"Evolution" EB20R-Sn

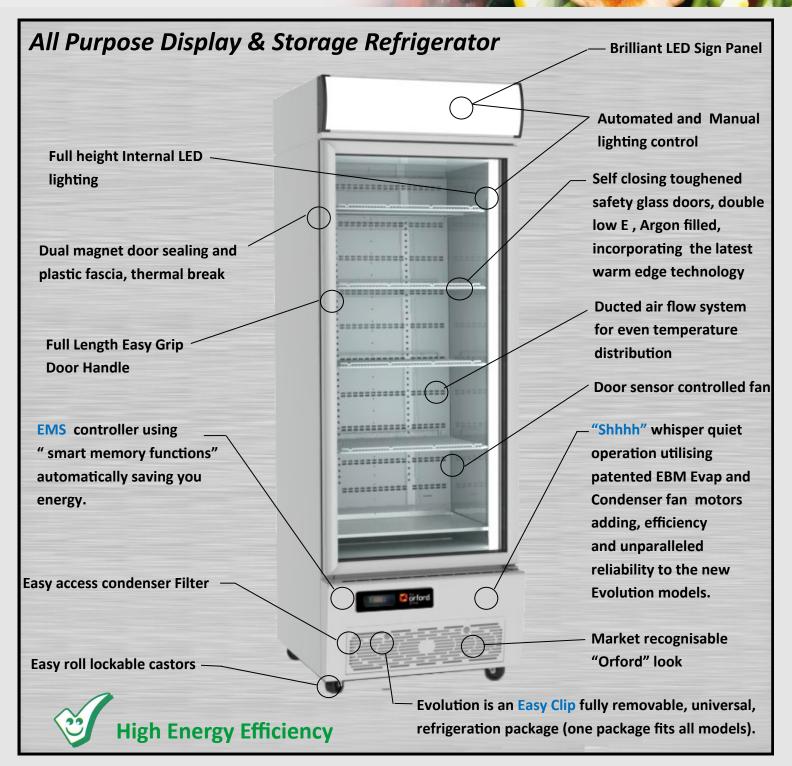

Proudly Australian Designed

by The Orford Group


IP protected by AUS DSN no 345317



With Evolution comes much responsibility. The Orford Group continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.











"Evolution" EB20R-Sn

Features

- (E) World class,
 - Design
 - > Energy Efficiency
 - > Performance
 - Quality
 - Reliability

$m{E}$ Universal Refrigeration Package

- > One package fits the entire **E**B Range
- > Cassette Style: Removable without tools
- Minimal training required for non-qualified personal to replace the package

$m{E}$ Energy Management System (EMS)

- Automatically learns you trading times
- Automates your energy savings
- > Perishable and non-perishable mode

\bigcirc Lighting Control

- Automated or manual control, you choose
- Independent switching of interior and sign lighting

(E) Condenser Fan Function


> Your choice of reversing or non-reversing function


(F) Condenser Filter


> Easy Access filter: No tools, no covers to remove



High Energy Efficiency



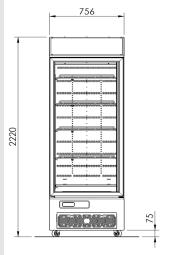

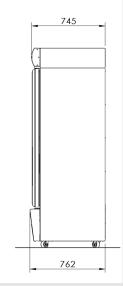

* Energy Consumption measured at 25°C. Cabinet Class 3M1 as per Australian Standard AS1731

EB20R-Sn **Vertical Display Refrigerator** with Illuminated Advertising Sign **Specifications** Powder Coated galvanized steel Construction Interior / Exterior White 595 Litres (Gross) Capacity Dimensions 756W x 762D x 2220H Weight **Operating Temp** 0° - 5° C. Ambient Temp Range 0° - 40° C. **Power Point** 220 - 240v 50Hz. (Standard GPO) Input Current 2.8 Amps Thermometer Digital Shelves 4 Height Adjustable Heavy Duty PVC Coated **Shelves** 1 Fixed Stainless Steel Base Shelves Shelf Adjustment 12mm Increments Refrigerated Shelf Area 1.42 m² Condensate Disposal Automatic by energy efficient, No Cost, Hot Gas 1 x Self Closing, Double Glazed Safety Glass, Double Door Heat reflective Low E, Warm edge, R/H **Footings** Heavy Duty Castors, Lockable Front Interior Light LED, Automatic and manual control Refrigerant R134a Drier Solid Core Insulation 50mm Polyurethane, CFC, HCFC, HFC Free **Cabinet Classes** 3M1, 4M1, 5M1 **MEPS** Compliant (High Efficiency) * Energy Consumption 3.43 kWh/24h Condenser Filter Easy front access Illuminated Advertising Sign 200mm High, Top Mounted Sign Illumination LED, Automatic and manual control

IP protected by AUS DSN no 345317

1300 ORFORD (1300 673 673)

+617 4641 7372

sales@orford.com.au

www.orford.com.au

