


## All Purpose Display & Storage Refrigerator—GDM1000-HG

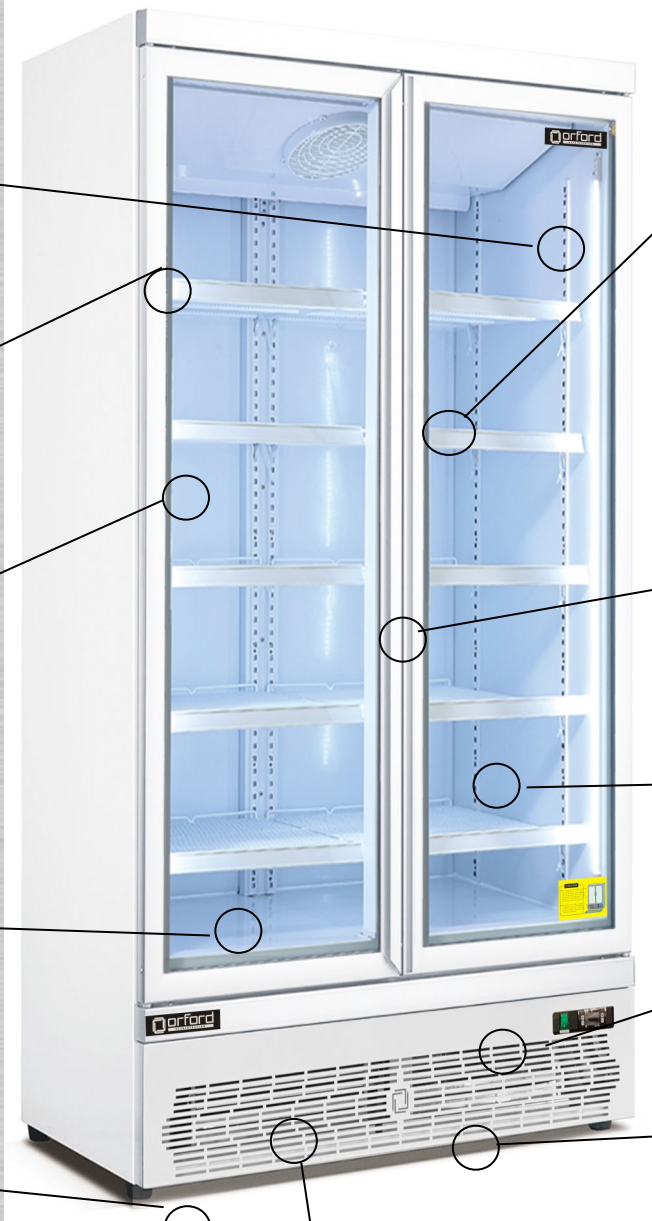

**Full height Internal LED lighting**

**Dual magnet door sealing and plastic fascia, thermal break**

**Orford Softline Door**

**Full Length Easy Grip Door Handle**

**Tropicalised Heated doors**

**Easy roll lockable castors**

**Self closing toughened safety glass doors, double low E , Argon filled, Heated doors**

**GDM fridges match the Orford FML freezers**

**Bright clean internal space  
Easy wipe clean**

**Electronic Controller**

**Market recognisable "Orford" look**

**The GDM fridge series have an easily removable Kick panel**

**High Energy Efficiency**





<b>Orford Fridge GDM1000-HG-B 2 Door Vertical Display Refrigerator</b>	
<b>Specifications</b>	
Construction	Powder Coated galvanized steel Interior /Exterior White
<b>GDM1000</b>	<b>2 DOOR REFRIGERATOR</b>
Capacity	1081 Litres (gross)
Dimensions	1258 w x 710 D + 30 mm stopper x 2039 H (mm)
Weight	179 kg (net)
Doors	2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E, 1° — 5°
Temp	32 degrees
Ambient Temperature	1 x 10 AMP plug
Power Point	* Energy Consumption 4.64 kWh/24h/m2
* Energy Consumption	Rated Current Draw 3.1 Amps
Rated Current Draw	<b>Common Specifications</b> GDM1000 / 1600
<b>Common Specifications</b>	Compressor Donper K480DU RoHS compliant
Compressor	Thermometer Digital Carel Ezy Controller
Thermometer	Shelves per door 5 Height Adjustable Heavy Duty PVC Coated
Shelves per door	Shelf Adjustment 12mm Increments
Shelf Adjustment	Shelf size 566 mm W x 480 mm D
Shelf size	Footings 4 x Heavy Duty 70 mm Castors, Lockable Front
Footings	Interior Light LED light
Interior Light	Refrigerant R290a
Refrigerant	Drier Solid Core
Drier	Insulation 60mm Polyurethane, CFC, HCFC, HFC Free
Insulation	Cabinet Classes
Cabinet Classes	Condenser Filter Easy front access
Condenser Filter	Door Orford Softline tropicalised heated doors
Door	Kick Panel Easy unclip and remove system
Kick Panel	Defrost Auto Defrost
Defrost	

