


All Purpose Display & Storage Refrigerator

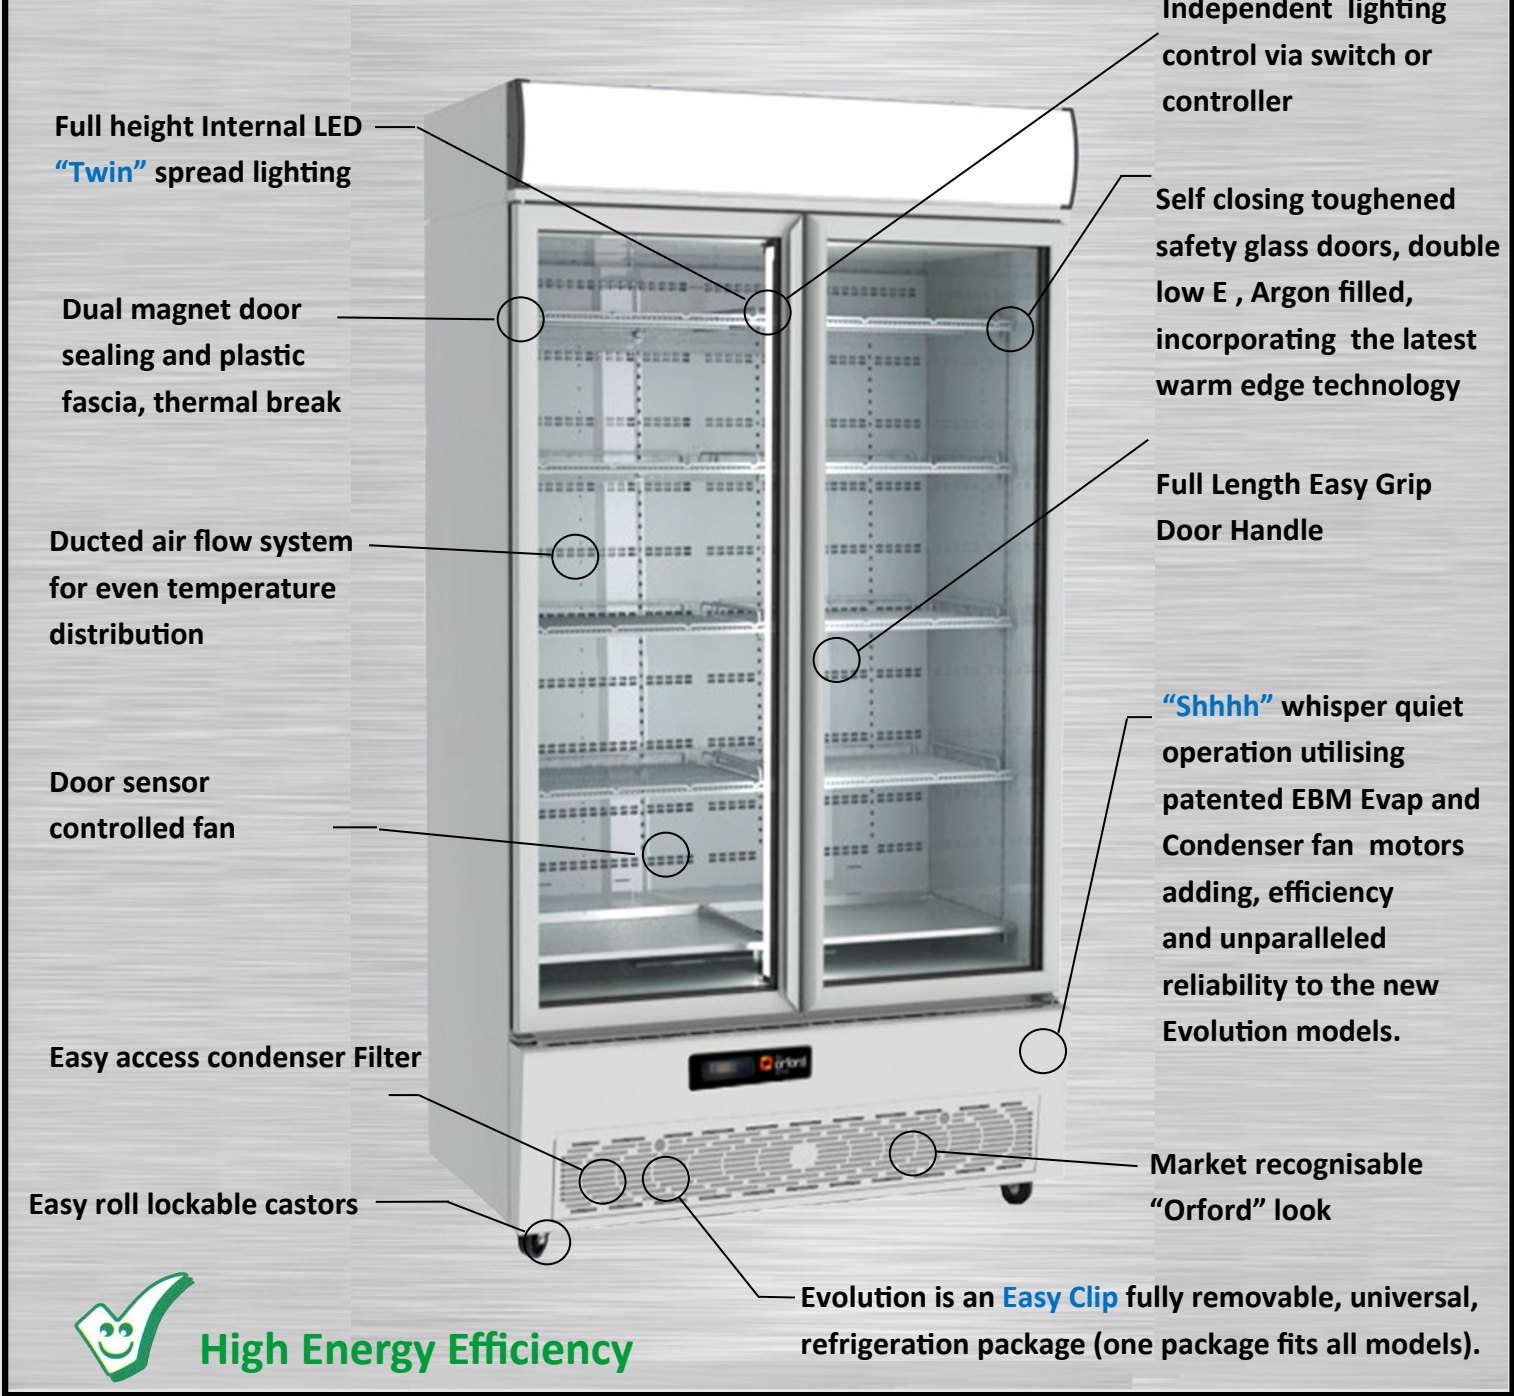

Full height Internal LED "Twin" spread lighting

Dual magnet door sealing and plastic fascia, thermal break

Ducted air flow system for even temperature distribution

Door sensor controlled fan

Easy access condenser Filter

Easy roll lockable castors

Independent lighting control via switch or controller

Self closing toughened safety glass doors, double low E , Argon filled, incorporating the latest warm edge technology

Full Length Easy Grip Door Handle

"Shhhh" whisper quiet operation utilising patented EBM Evap and Condenser fan motors adding, efficiency and unparalleled reliability to the new Evolution models.

Market recognisable "Orford" look

Evolution is an Easy Clip fully removable, universal, refrigeration package (one package fits all models).

High Energy Efficiency

Proudly Australian Designed
by Orford Refrigeration










Orford Refrigeration continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.

1300 ORFORD (1300 673 673)
+617 4641 7372
@ sales@orford.com.au
www.orford.com.au






✉ 382 South Street
Harristown
Queensland 4350
Australia

Features

-  World Class Design
-  World Class Energy Efficiency
-  World Class Performance, Quality & Reliability
-  Universal Refrigeration Package
-  - One package fits the entire EB Range
-  - Cassette Style : Removable without tools
-  - Minimal training required for non-qualified personal to replace the package

Features


-  Independent light switch via switch or via controller
-  Condenser Filter—Easy access to filter with NO tools or covers to remove
-  Carel Ezy Controller



High Energy Efficiency



EB30R	Vertical Display Refrigerator with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Interior / Exterior White
Capacity	895 Litres (Gross)
Dimensions	1094W x 762D x 2220H
Weight	210Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital— Carel Ezy
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	2.17 m ²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	2 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED with independent light switches
Refrigerant	R134a
Drier	Solid Core
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.24 kWh/24h
Condenser Filter	Easy front access

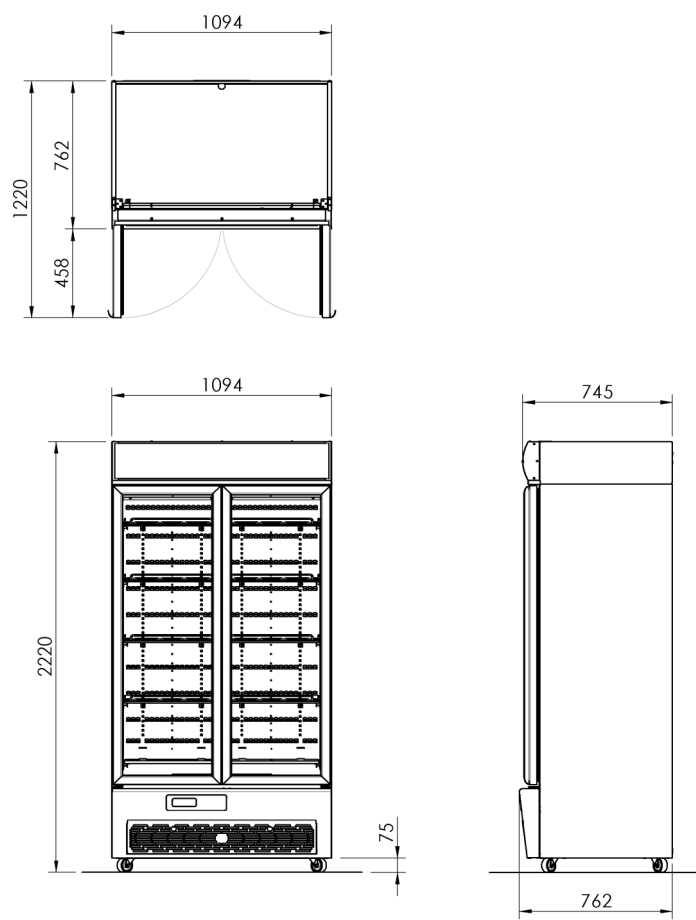

* Energy Consumption measured at 25°C. Cabinet Class 3M1 as per Australian Standard AS1731

